



PRE-BUILT

TV/LAMP TRUCKS



CUES PRE-BUILT TV/LAMP TRUCKS - CUES has PRE-BUILT TV/LAMP trucks available for quick delivery! To get your order processed, contact your CUES Regional Sales Manager for your state or one of our partnered dealerships to discuss availability, options, and pricing. From start to finish, most pre-built vehicles can be delivered in approximately 4 weeks from purchase order.

Call your CUES Regional Sales Manager Today!

www.cuesinc.com | 800.327.7791 | salesinfo@cuesinc.com






CUES PRE-BUILT TV/LAMP TRUCKS



 Below is a brief summary of the equipment for this specific vehicle only. For more information, please contact your CUES Regional Sales Manager.

PRE-BUILT TV/LAMP TRUCK

- ◆ FORD F-550 DIESEL CAB CHASSIS 205" WB 2X4 CHASSIS
- ◆ 16' CARGO BOX FOR CAB/CHASSIS
- ◆ KIT,1 DRAWER UNDER CRANE,F/LAMP II
- ◆ SAFE ENTRY/EXIT BUMPER
- ◆ CRANE,WM POWER BOOM,STAND MT,W/LGTS
- ◆ STAND, 8.375"H, POWER BOOM CRANE
- ◆ TV HIGH CUBE VAN EXTERIOR LIGHTING & CONTROL ROOM - EVOLUTION 3.0
- ◆ TRANSPORTER/CAMERA LOCKABLE STORAGE COMPARTMENT WITH NOTCH IN REAR
- ◆ DOOR THRESHOLD OF BODY FOR TV CABLE TO PASS THROUGH TO TRANSPORTER STORAGE DRAWER
- ◆ KICKPLATE 2 DRAWER ALUMINUM STORAGE
- ◆ ROOF TOP AIR CONDITIONER, 13,500 BTU WITH HEAT STRIP
- ◆ WALL MOUNTED ELECTRIC HEATER
- ◆ CURBSIDE DOOR WITH FOLD-DOWN STEPS FOR EVO 3.0
- ◆ BENCH SEAT IN CONTROL ROOM
- ◆ CUSHION FOR BENCH SEAT
- ◆ CLOSET IN CONTROL ROOM
- ◆ TV HI-CUBE VAN EQUIPMENT ROOM INTERIOR - EVOLUTION 3.0 TO INCLUDE:
- ◆ 20-GALLON WASHDOWN SYSTEM TO INCLUDE:
- ◆ UPPER AND LOWER STORAGE CABINET IN EQUIPMENT ROOM
- ◆ BACK-UP COLOR CAMERA SYSTEM [CHASSIS]
- ◆ DRAWER UNIT,PACK RAT,42X17.75X12.25 IN LOWER CABINET ER
- ◆ 6 OUTLET WORKSTATION WITH ADJUSTABLE LED LIGHTS AND DUAL USB PORTS
- ◆ TOOL CHEST, MODULINE, 5 DRAWER
- ◆ 4 1/2" VISE, BENCH MOUNT
- ◆ FIRST AID KIT
- ◆ HOLDER,TOWEL,UNIVERSAL 2-SHELF
- ◆ 32" REAR FLAT SCREEN MONITOR MOUNTED IN BULKHEAD WALL
- ◆ 7500 WATT QUIET DIESEL ONAN GENERATOR
- ◆ GENERATOR COMPARTMENT
- ◆ SYSTEM ENGINEERING PANEL, FOR POWER INFORMATION AND GENERATOR FUNCTIONS, RACK MOUNTED
- ◆ TB319 TEST CABLE
- ◆ 1500' CABLE ASSEMBLY, M/C 12PIN METAL
- ◆ TV REEL ASSEMBLY FOR DUC, MECHANICAL FOOTAGE FOR SUMMIT .450 CABLE W/AUTO PAYOUT
- ◆ CONFIGURE TV REEL FOR HD CAMERA USE

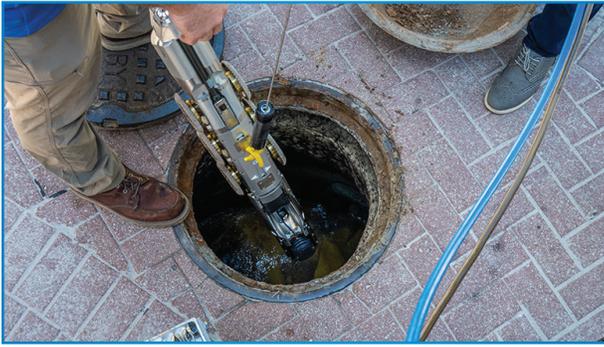

PRE-BUILT TV/LAMP TRUCK - CONTINUED

- ♦ AUTOMATIC PAYOUT SYSTEM FOR REEL - INSTALLED
- ♦ (2) 22" (MINIMUM) FLATSCREEN COLOR INDUSTRIAL TV MONITOR NTSC / PAL COLOR STANDARDS
- ♦ PCU ASSEMBLY [RACK MOUNT]
- ♦ CCU ASSEMBLY [RACK MOUNT]
- ♦ SHORTING PLUG, K2, 12PIN, BLUE
- ♦ 8.7" MINI KEYBOARD
- ♦ BRACKET, LOGITECH CONTROLLER, K2
- ♦ WIRELESS CONTROLLER
- ♦ WIRED USB CONTROLLER
- ♦ NO COMPUTER INSTALLED/ ADDED PER ORDER
- ♦ ALL NECESSARY CABLING AND COMPONENTS TO COMPLETE THE INTERFACE BETWEEN THE DATA ACQUISITION SYSTEM, PERIPHERALS, AND THE VIDEO INSPECTION EQUIPMENT
- ♦ USB BLACK COMPUTER KEYBOARD AND MOUSE
- ♦ PRINTER, CANON PIXMA MG3620
- ♦ UPS
- ♦ LAMP REEL AND SYSTEM SELECT INSTALLED ON TRUCK/BUILT LAMP READY
- ♦ NO LAMP LAUNCHER AND ACCESSORIES
- ♦ QUICK CABLE LOCK PIGTAIL COUPLER KIT
- ♦ SPARE 150' PUSH CABLE FOR LATERAL INSPECTION SYSTEM
- ♦ 150' PUSH CABLE FOR LATERAL INSPECTION SYSTEM ON REEL
- ♦ 30" MANHOLE HOOK
- ♦ KIT, DOWNHOLE, STD
- ♦ TIGER TAIL
- ♦ MULTI CONDUCTOR TV ONLY TOOL KIT

*SPECIFICATIONS CAN CHANGE WITHOUT NOTICE.

**INTERNATIONAL CONFIGURATION MAY VARY TO COMPLY WITH THE U.S. DEPARTMENT OF COMMERCE, BUREAU OF INDUSTRY & SECURITY REGULATIONS ON EXPORT OF TECHNOLOGY.

***TRAINING & DELIVERY WILL BE DETERMINED WHEN ORDER IS PLACED.

