



# PRE-BUILT

## TV/ONLY TRUCKS



**CUES PRE-BUILT TV/ONLY TRUCKS** - CUES has PRE-BUILT TV/ONLY trucks available for quick delivery! To get your order processed, contact your CUES Regional Sales Manager for your state or one of our partnered dealerships to discuss availability, options, and pricing. From start to finish, most pre-built vehicles can be delivered in approximately 4 weeks from purchase order.


**Call your CUES Regional Sales Manager Today!**

[www.cuesinc.com](http://www.cuesinc.com) | 800.327.7791 | [salesinfo@cuesinc.com](mailto:salesinfo@cuesinc.com)





## CUES PRE-BUILT TV/ONLY TRUCKS

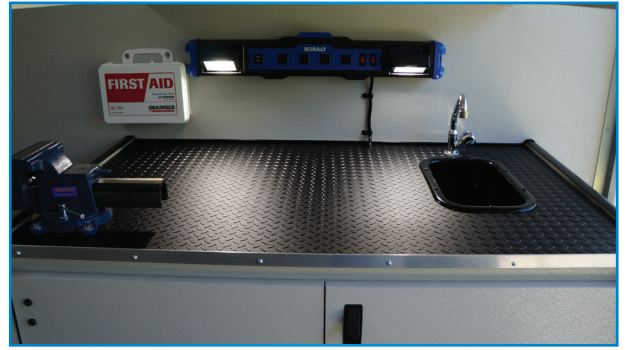

 Below is a brief summary of the equipment for this specific vehicle only. For more information, please contact your CUES Regional Sales Manager.

### PRE-BUILT TV/ONLY TRUCK

- ♦ FORD F-550 DIESEL CAB CHASSIS 205" WB 2X4 CHASSIS
- ♦ 16' CARGO BOX FOR CAB/CHASSIS
- ♦ STORAGE DRAWER/POWER BOOM CRANE DEPLOYMENT SYSTEM
- ♦ KIT,1 DRAWER UNDER CRANE,F/LAMP II
- ♦ KIT,SEE BUMPER,EVO 3
- ♦ KICKPLATE TRANSPORTER STORAGE
- ♦ KICKPLATE 2 DRAWER STACK ALUMINUM STORAGE
- ♦ BACK-UP COLOR CAMERA SYSTEM [CHASSIS]
- ♦ TV HIGH CUBE VAN EXTERIOR LIGHTING & CONTROL ROOM - EVOLUTION 3.0
- ♦ LOCK SET,LAMINATED STEEL
- ♦ ROOF TOP AIR CONDITIONER, 13,500 BTU WITH HEAT STRIP
- ♦ WALL MOUNTED ELECTRIC HEATER
- ♦ WALL MOUNTED ELECTRIC HEATER HOUSING
- ♦ CURBSIDE DOOR FOR EVO 3.0
- ♦ SIDE DOOR STEPS
- ♦ BENCH SEAT IN VIEWING ROOM
- ♦ CUSHION FOR BENCH SEAT
- ♦ CLOSET IN VIEWING ROOM
- ♦ TV HI-CUBE VAN EQUIPMENT ROOM INTERIOR - EVOLUTION 3.0 TO INCLUDE:
- ♦ MULTI-OUTLET WORKSTATION WITH LIGHTS AND USB PORTS
- ♦ 20-GALLON WASHDOWN SYSTEM TO INCLUDE:
- ♦ UPPER AND LOWER STORAGE CABINET IN EQUIPMENT ROOM
- ♦ PACK RAT DRAWER UNIT FOR EQUIPMENT ROOM LOWER CABINET
- ♦ 5-DRAWER TOOL CHEST, MODULINE
- ♦ 4 1/2" VISE, BENCH MOUNT
- ♦ FIRST AID KIT
- ♦ UNIVERSAL PAPER TOWEL HOLDER IN EQUIPMENT ROOM
- ♦ 32" REAR FLAT SCREEN MONITOR MOUNTED IN BULKHEAD WALL
- ♦ 7500 WATT QUIET DIESEL ONAN GENERATOR
- ♦ GENERATOR COMPARTMENT [UNDER CHASSIS MOUNT]
- ♦ SYSTEM ENGINEERING PANEL, FOR POWER INFORMATION AND GENERATOR FUNCTIONS, RACK MOUNTED
- ♦ QUICK CABLE LOCK PIGTAIL COUPLER KIT
- ♦ CABLE ASSY TEST TB319
- ♦ TV REEL ASSEMBLY FOR, MECHANICAL FOOTAGE FOR SUMMIT .450 CABLE W/AUTO PAYOUT DUC
- ♦ 1500' CABLE ASSEMBLY, M/C 12PIN METAL



#### PRE-BUILT TV/ONLY TRUCK - CONTINUED

- ◆ PCU ASSEMBLY [RACK MOUNT]
- ◆ CCU ASSEMBLY [RACK MOUNT]
- ◆ WIRELESS CONTROLLER
- ◆ WIRED USB CONTROLLER
- ◆ BRACKET, LOGITECH CONTROLLER, K2
- ◆ 8.7" MINI KEYBOARD
- ◆ SHORTING PLUG
- ◆ (2) 19" (MINIMUM) FLATSCREEN COLOR INDUSTRIAL TV MONITOR NTSC / PAL COLOR STANDARDS
- ◆ (2) MOUNTING HARDWARE FOR MONITOR TO INCLUDE BRACKET(S), AND / OR MOUNT(S), AND
- ◆ MISCELLANEOUS HARDWARE REQUIRED TO SECURE MONITOR FOR OPTIMAL SAFETY AND VIEWING
- ◆ NO GNET COMPUTER INSTALLED
- ◆ ALL NECESSARY CABLING AND COMPONENTS TO COMPLETE THE INTERFACE BETWEEN THE DATA ACQUISITION SYSTEM, PERIPHERALS, AND THE VIDEO INSPECTION EQUIPMENT
- ◆ KEYBOARD AND MOUSE COMBO,WIRED
- ◆ INKJET PRINTER
- ◆ KIT,UPS,BELOW MOUNT
- ◆ TVO SYSTEM SELECT INSTALLED ON TRUCK
- ◆ KIT,DOWNHOLE,STD
- ◆ TIGER TAIL
- ◆ 30" MANHOLE HOOK
- ◆ MULTI CONDUCTOR TV ONLY TOOL KIT

\*SPECIFICATIONS CAN CHANGE WITHOUT NOTICE.

\*\*INTERNATIONAL CONFIGURATION MAY VARY TO COMPLY WITH THE U.S. DEPARTMENT OF COMMERCE, BUREAU OF INDUSTRY & SECURITY REGULATIONS ON EXPORT OF TECHNOLOGY.

\*\*\*TRAINING & DELIVERY WILL BE DETERMINED WHEN ORDER IS PLACED.